



Auxiliary switch, 1 NO+1 NC, accessory for main and emergency switching-off 3LD2 switch front mounting and for molded case switch 3LD5 UL front mounting

Model	
product brand name	SETRON
product designation	auxiliary switch
design of the product	accessories for 3LD2 main and EMERGENCY-STOP switches, front mounting
operational current	<ul style="list-style-type: none">• at AC-15 at 110 V rated value 6 A• at AC-15 at 230 V rated value 3 A• at AC-15 at 500 V rated value 1.4 A• at DC-13 at 24 V rated value 4 A
special product feature	NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch
tightening torque with screw-type terminals	<ul style="list-style-type: none">• minimum 0.8 N·m• maximum 1.2 N·m

Approvals Certificates	
General Product Approval	



[Confirmation](#)





[Miscellaneous](#)



other	Environment
Miscellaneous	Confirmation Environmental Con- firmations Environmental Con- firmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9200-5B Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3LD9200-5B Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9200-5B CAx-Online-Generator http://www.siemens.com/cax Tender specifications

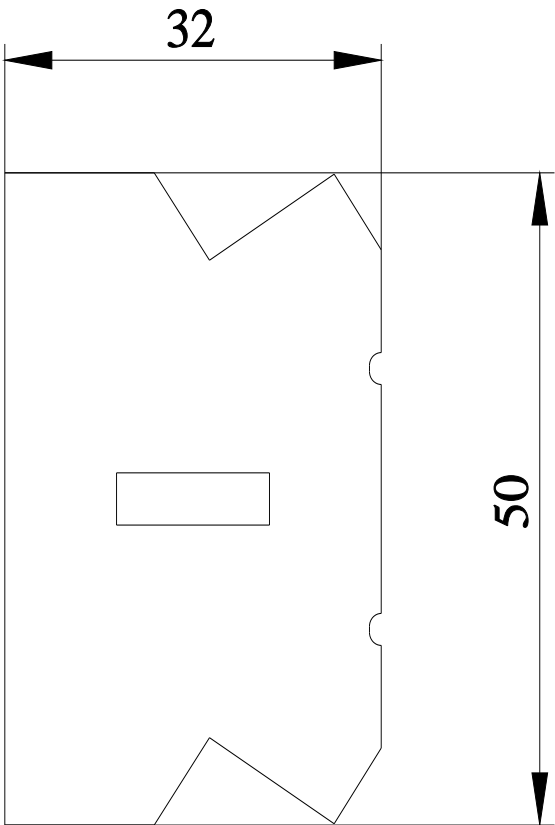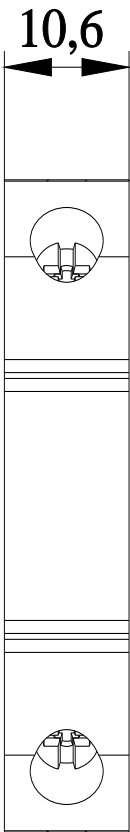

last modified:

4/18/2024 

