



bus connectors broadened front mounted; 4 units extended pole-center distance for India


Model		
product brand name	SENTRON	
product designation	Front bus connectors broadened 4 units	
accessories	Bus connector offset	
General technical data		
designation / of the terminal	screw-type termination	
Connections according IEC		
connectable conductor cross-section <ul style="list-style-type: none">for copper cable / stranded / minimumfor copper cable / stranded / maximum	120 mm ² 370 mm ²	
type of connectable conductor cross-sections / of the laminated conductor rails <ul style="list-style-type: none">maximum	1x60x12.5	
tightening torque / when using copper cables <ul style="list-style-type: none">stranded	30	
thickness / of the busbar <ul style="list-style-type: none">minimummaximum	5 ... 12.5	
width / of the busbar / maximum	60 mm	
Certificates		
General Product Approval	EMV	Test Certificates



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping	other	Environment		
 LRS	Miscellaneous	Confirmation	Miscellaneous	Environmental Confirmations

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9484-0QC50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9484-0QC50>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9484-0QC50

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

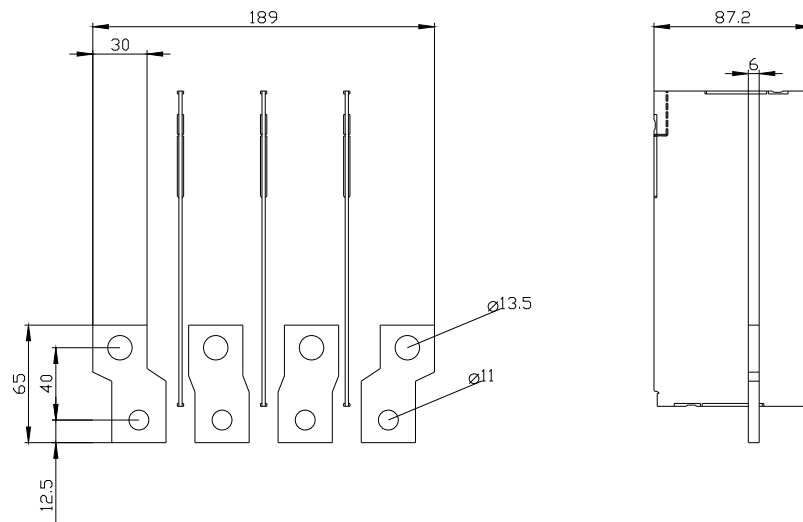

last modified:

4/19/2024 

