


accessory 3VJ9 IEC framesize 3VJ11 125A bus connector offset front 2 pieces

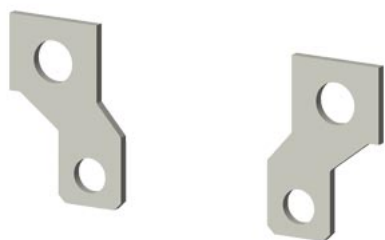

Model	
product designation	front bus connector offset
design of the product	accessory for 3VJ breaker
accessories	connection technology
Mechanical Design	
connectable conductor cross-section / for copper cable / finely stranded / with core end processing	
• minimum	2.5 mm ²
• maximum	50 mm ²
Connections according IEC	
connectable conductor cross-section / for copper cable / finely stranded / with core end processing	
• minimum	2.5 ... 50
• maximum	
type of connectable conductor cross-sections / of the laminated conductor rails	
• minimum	1 x 22 x 2
• maximum	1 x 22 x 5
thickness / of the busbar	
• minimum	2 ... 5
• maximum	
width / of the busbar / maximum	22 mm
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#) [Confirmation](#)

Further information	
Information on the packaging	
https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,...)	
http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9112-0ED00	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)	
https://support.industry.siemens.com/cs/ww/en/ps/3VJ9112-0ED00	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)	
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9112-0ED00	
CAx-Online-Generator	
http://www.siemens.com/cax	

last modified:

1/14/2021 

