

accessory 3VJ9 IEC framesize 3VJ11 125A framesize 3VJ12 250A undervoltage release 48VDC

Model	
product designation	undervoltage release
design of the product	accessory for 3VJ breaker
accessories	auxiliary release
General technical data	
degree of pollution	3
consumed active power / at DC / maximum	5 W
Voltage	
control supply voltage (Us) / at DC	48 V
Mechanical Design	
net weight	148 g
ambient temperature / during operation	
• minimum	-5 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-5 °C
• maximum	70 °C
tightening torque / with screw-type terminals / minimum	0.5 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
ambient temperature / during storage	
• minimum	-5 °C
• maximum	70 °C
ambient temperature / during operation	
• minimum	-5 °C
• maximum	60 °C
Connections according IEC	
type of electrical connection / for auxiliary circuit	screw connection
stripped length	10 mm
connectable conductor cross-section	
• minimum	0.5 ... 2.5
• maximum	
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9218-0UV12>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VJ9218-0UV12>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9218-0UV12

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

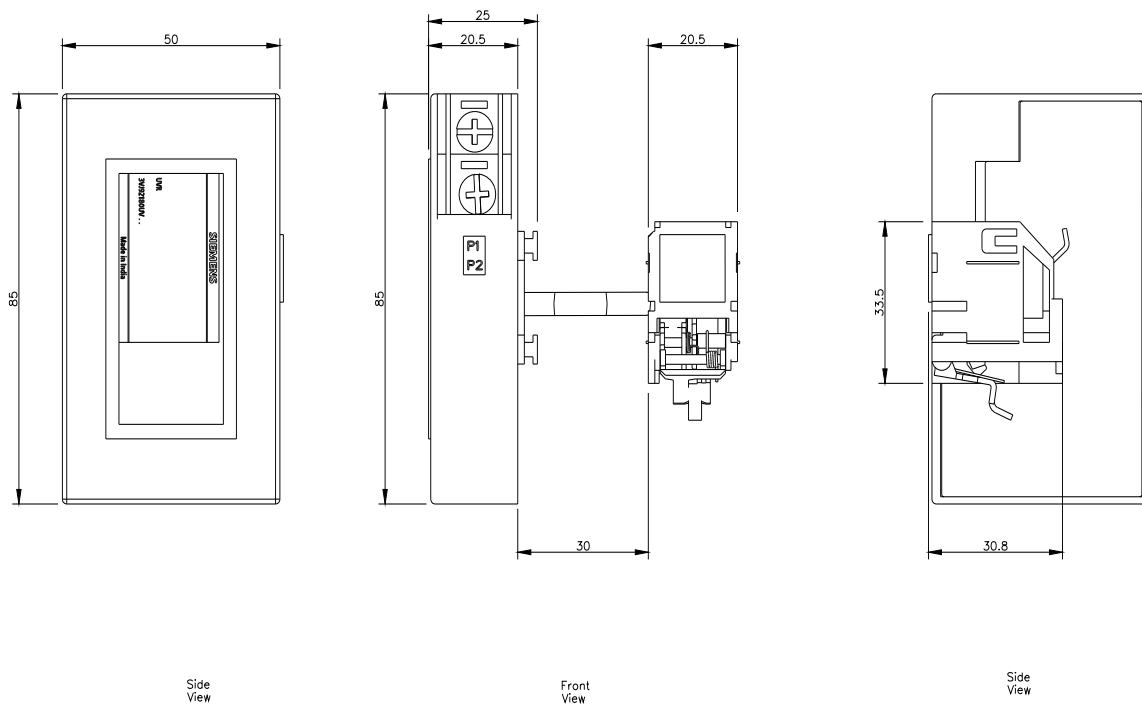

last modified:

1/14/2021

