


accessory 3VJ9 IEC framesize 3VJ13 400A framesize 3VJ14 630A 1 x changeover
contact auxiliary switch left




Model	
product designation	auxiliary switch
design of the product	accessory for 3VJ breaker
accessories	auxiliary switch
Voltage	
insulation voltage	500 V
surge voltage resistance	3.2 kV
operating voltage / at AC / at 50 Hz / rated value / minimum	240 V
operating voltage / at DC / rated value / minimum	48 V
Current	
thermal current	5 A
Mechanical Design	
net weight	32 g
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
ambient temperature / during storage	
• minimum	-15 °C
• maximum	75 °C
ambient temperature / during operation	
• minimum	-10 °C
• maximum	60 °C
Certificates	
Test Certificates	other

[Type Test Certificates/Test Report](#) [Confirmation](#)

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ9417-0AN11
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3VJ9417-0AN11
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ9417-0AN11
CAX-Online-Generator

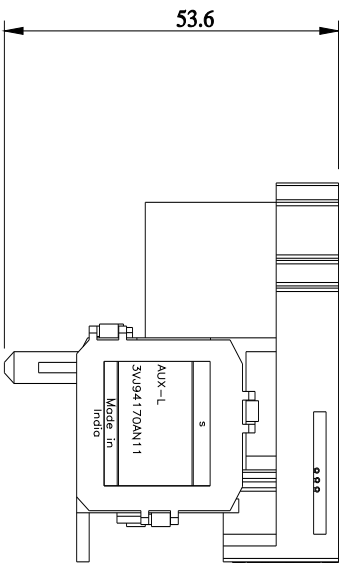

SIDE VIEW

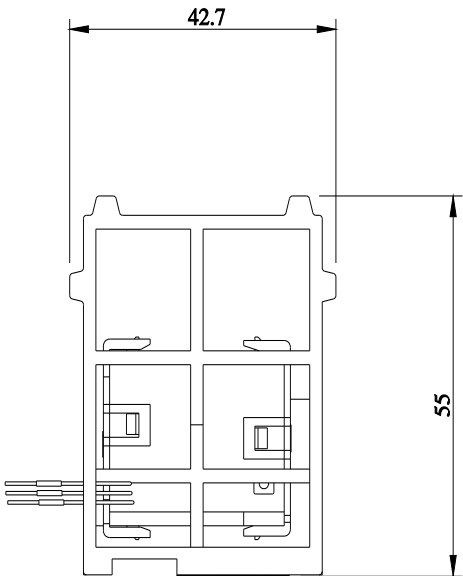

FRONT VIEW

last modified:

5/21/2021 

