






circuit breaker VL1600N standard breaking capacity  $I_{cu}=55kA$ , 415V AC 3-pole, non-auto. air circ. br. trip unit magnetic  $I_n=1600A$ , rated current  $I_l=14400A$ , short-circuit protection without auxiliary release without auxiliary/alarm switch

Model	
type of the driving mechanism motor drive	No
design of the overcurrent release	M
General technical data	
number of poles	3
size of the circuit-breaker	3VL8
mechanical service life (operating cycles) typical	3 000
electrical endurance (operating cycles) typical	1 500
utilization category	A
performance class for circuit breaker	N
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750	Q
operating frequency maximum	30 1/s
Voltage	
Rated operational voltage $U_e$ max.	690 V
<ul style="list-style-type: none"> <li>insulation voltage rated value</li> <li>insulation voltage (<math>U_i</math>) at AC rated value</li> </ul>	800 V
surge voltage resistance rated value	8 kV
operating voltage <ul style="list-style-type: none"> <li>rated value maximum</li> <li>for main current circuit at AC at 50 Hz maximum</li> <li>for main current circuit at AC at 60 Hz maximum</li> <li>for main current circuit at DC maximum</li> </ul>	690 V 690 V 690 V 500 V
Protection class	
protection class IP	IP20
protection function of the overcurrent release	I
Main circuit	
operating frequency <ul style="list-style-type: none"> <li>1 rated value</li> <li>2 rated value</li> </ul>	50 Hz 60 Hz
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Suitability	
suitability for use	non-automatic circuit-breakers
Product details	
product component <ul style="list-style-type: none"> <li>trip indicator</li> <li>auxiliary switch</li> <li>voltage trigger</li> <li>undervoltage release</li> <li>undervoltage release with leading contact</li> </ul>	No No No No No
product extension optional motor drive	Yes
Product function	
product function <ul style="list-style-type: none"> <li>of thermal overload trip unit</li> <li>grounding protection</li> <li>for neutral conductors short-circuit and overload proof</li> </ul>	without No No

• overload protection	No
<b>Short circuit</b>	
operating short-circuit current breaking capacity (Ics)	
• at 240 V rated value	35 kA
• at 415 V rated value	28 kA
• at 500 V rated value	20 kA
• at 690 V rated value	10 kA
maximum short-circuit current breaking capacity (Icu)	
• at 240 V rated value	65 kA
• at 415 V rated value	55 kA
• at 440 V rated value	35 kA
• at 480 V according to NEMA rated value	25 kA
• at 500 V rated value	25 kA
• at 600 V according to NEMA rated value	20 kA
• at 690 V rated value	20 kA
<b>Connections</b>	
arrangement of electrical connectors for main current circuit	front side
type of connectable conductor cross-sections for auxiliary contacts	
• solid	0.75 ... 1.5 mm <sup>2</sup>
• finely stranded with core end processing	0,75 ... 1.0 mm <sup>2</sup>
type of electrical connection for main current circuit	without connection accessoires
<b>Mechanical Design</b>	
height	406.5 mm
width	228.5 mm
depth	333.5 mm
fastening method	fixed mounting
<b>Environmental conditions</b>	
ambient temperature during operation	
• minimum	0 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C
<b>Approvals Certificates</b>	
<b>General Product Approval</b>	
  <a href="#">Confirmation</a>  <a href="#">Miscellaneous</a> 	
EMV	 <a href="#">Miscellaneous</a> <a href="#">Special Test Certificate</a> <a href="#">Confirmation</a> <a href="#">Miscellaneous</a> <a href="#">Miscellaneous</a>
Railway	<a href="#">Special Test Certificate</a> <a href="#">Confirmation</a> <a href="#">Transport Information</a> <a href="#">Environmental Confirmations</a> <a href="#">Environmental Confirmations</a>

<b>Further information</b>	
Information on the packaging <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a> Information- and Downloadcenter (Catalogs, Brochures,...) <a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>	

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL8716-1DE30-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VL8716-1DE30-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VL8716-1DE30-0AA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL8716-1DE30-0AA0)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

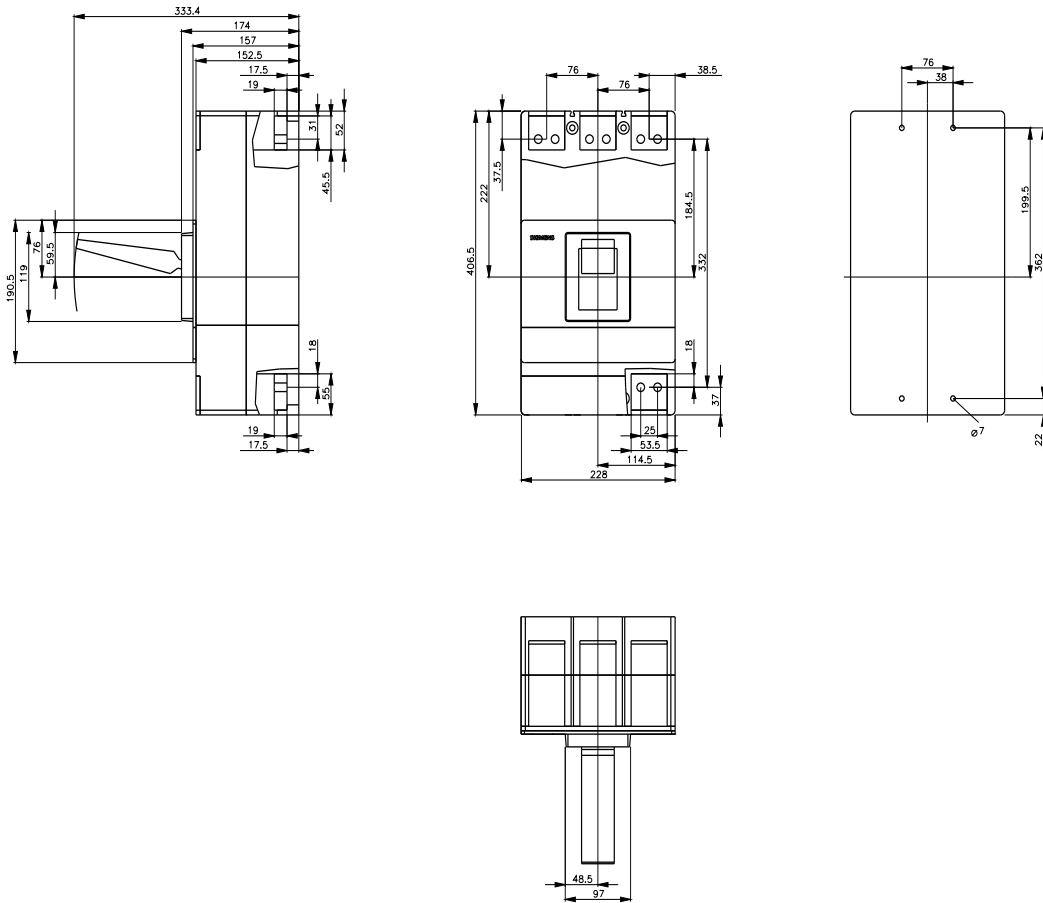

last modified:

12/21/2020 

