



bus connectors broadened front mounted; 4 units extended pole-center distance for India

Model	
product brand name	SENTRON
product designation	accessories
design of the product	front bus connectors broadened 4 units
accessories	Bus connector offset
General technical data	
designation / of the terminal	screw-type termination
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	70 mm ²
• for copper cable / stranded / maximum	120 mm ²
type of connectable conductor cross-sections / of the laminated conductor rails	
• maximum	1x35x10
tightening torque / when using copper cables	
• stranded	20
thickness / of the busbar	
• minimum	3 ... 10
• maximum	
width / of the busbar / maximum	35 mm
Certificates	
General Product Approval	
Marine / Shipping	



[Confirmation](#)

[Miscellaneous](#)



other	Environment
Miscellaneous	Confirmation
	Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM9254-0QC50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VM9254-0QC50>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM9254-0QC50

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

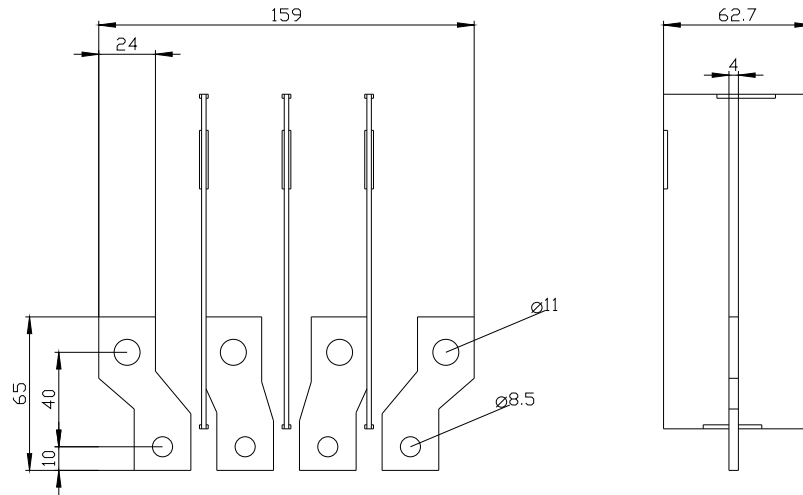

last modified:

8/19/2022 

