



Figure similar

remote operating mechanism 5ST3 Power 12-30 V AC / 12-48 V DC; 2 MW; for CB, RCCB, RC units, RCBO, ON/OFF switch

Model	
product brand name	SENTRON
product designation	Remote controlled mechanism Power
display version LED	Yes
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Supply voltage	
operating voltage	
• rated value	24 V
• at AC rated value minimum	12 V
• at AC rated value maximum	30 V
• at DC rated value minimum	12 V
• at DC rated value maximum	48 V
protection class IP	IP20
Dissipation	
power loss [V·A] during standby	1 W
Control current	
type of voltage of control voltage	AC/DC
Product details	
product component	
• fault signal contact	Yes
• auxiliary switch	Yes
number of fault signal contacts	1
number of NC contacts	0
number of NO contacts	0
number of CO contacts	1
design of the auxiliary switch	1 CO contact, 2 A, 250 V AC
product extension can be mounted	Universal
product extension	remote operating mechanism
type of fault signal contact	1 CO, 5 A, 250 V AC
number of remote reset per minute	2
Connections	
wire length in the control circuit	1 500 m
tightening torque with screw-type terminals	
• minimum	0.2 N·m
• maximum	0 N·m
type of connectable conductor cross-sections for AWG cables	14 ... 30
Mechanical Design	

height	90 mm
width	36 mm
depth	70 mm
number of modular width units	2
net weight	188 g

Environmental conditions

ambient temperature during operation	
• minimum	-25 °C
• maximum	45 °C
ambient temperature during storage minimum	-40 °C

Approvals Certificates

General Product Approval	other
--------------------------	-------



[Confirmation](#)

[Miscellaneous](#)



[Confirmation](#)

other	Railway	Dangerous Good	Environment
-------	---------	----------------	-------------

[Miscellaneous](#)

[Confirmation](#)

[Transport Information](#)



[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3055>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3055>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3055


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

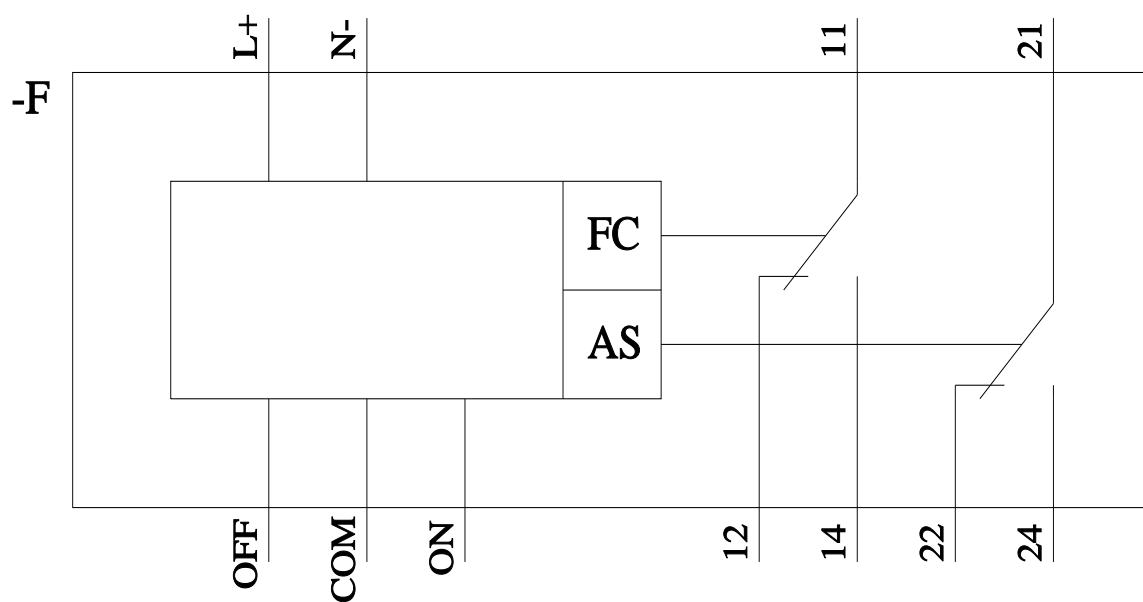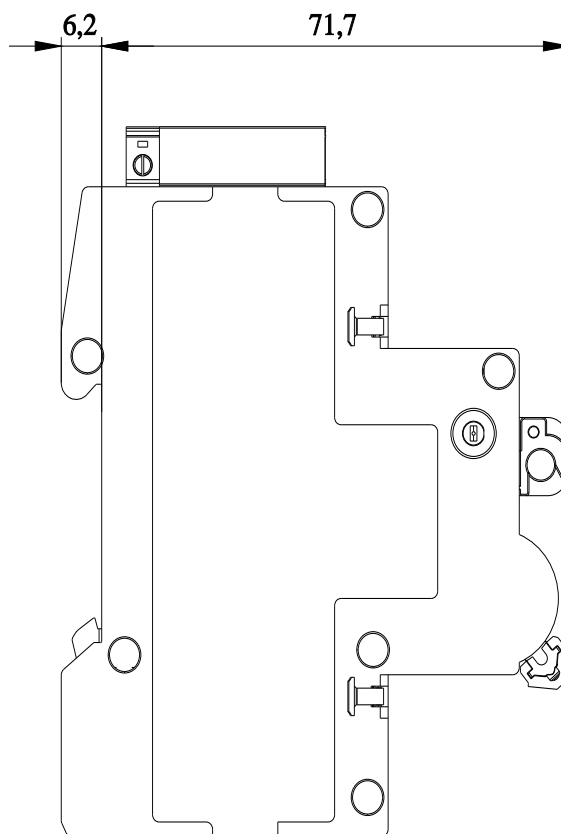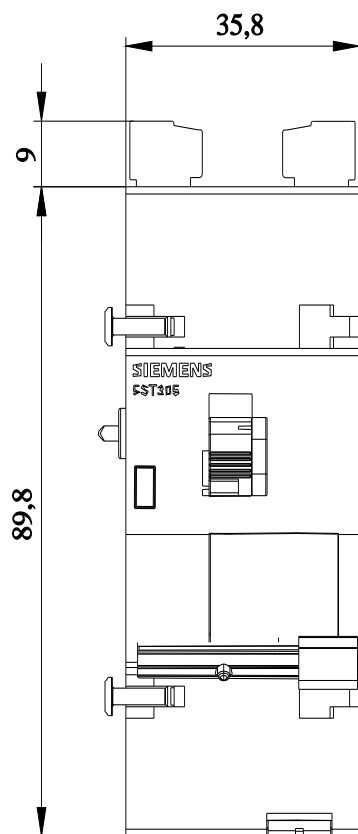

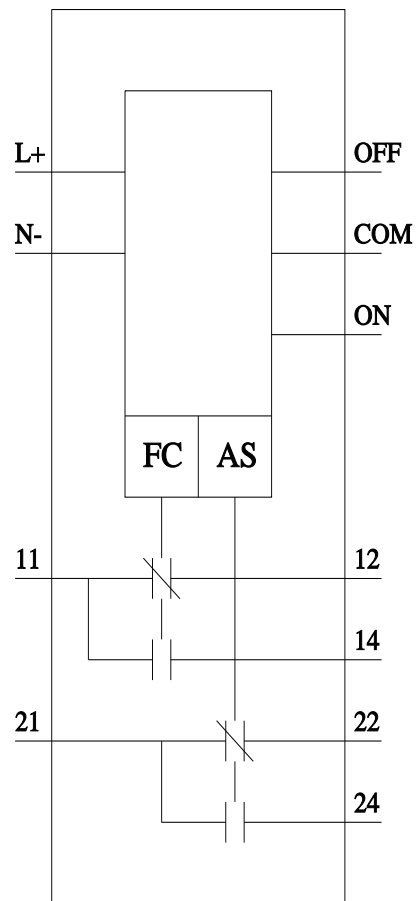

last modified:

3/12/2024 

