

Product data sheet

Specifications



buffer module, phaseo ABL7 ABL8,
24 to 28.8V DC, 40A, for power
supply

ABL8BUF24400

Product availability : Stock - Normally stocked in distribution
facility

Price* : 449.00 USD

Main

Range of Product	Phaseo
Product or Component Type	Buffer module
Input voltage	24...28.8 V DC
Output voltage	(Uin-0.25) V nominal mode DC (Uin-1) V buffer mode DC
Maximum output current	40 A
Holding time	0.1 s 40 A 6 s 0.5 A

Complementary

Input voltage limits	22...30 V
Maximum power dissipation in W	15 W
Activation threshold	(Uin-1) V and 22 V min
Charging time	25 s
Number of output channels	1
Current consumption	0.6 A on load 0.1 mA no load <= 40.6 A
Output protection type	Against overload > 45 A Against short-circuits power-supplied mode, automatic reset Against undervoltage tripping if U < 19 V
Connections - terminals	Input connection screw type terminals 2 x 0.5...2 x 10 mm² AWG 20...AWG 8 Output connection screw type terminals 2 x 0.5...2 x 10 mm² AWG 20...AWG 8 Diagnostic relay removable screw terminal block 1 x 2.5 mm² AWG 14
Fixing mode	By clips 35 mm symmetrical DIN rail horizontal By clips 35 mm symmetrical DIN rail vertical
Output coupling	Parallel
Operating altitude	6561.68 ft (2000 m)
Marking	CE
Name of test	Electrostatic discharges IEC 61000-4-2 Emission IEC 61000-6-3 Induced electromagnetic field IEC 61000-4-6 level 3 Radiated electromagnetic field IEC 61000-4-3 level 3 Rapid transient IEC 61000-4-4 level 3 Surge IEC 61000-4-5 level 2 Conducted/radiated emissions EN 55022 Class B, 20 %

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Local signalling	for buffer ready 1 LED (green) for buffer ready 1 relay
Net Weight	2.65 lb(US) (1.2 kg)
Environment	
Product Certifications	RCM EAC
Standards	UL 508 CSA C22.2 No 60950-1
Ambient air temperature for operation	-13...140 °F (-25...60 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Environmental characteristic	EMC IEC 61000-6-3 EMC IEC 61000-6-2 Safety IEC 60950-1 Safety EN/IEC 61204-3
IP degree of protection	IP20 conforming to IEC 60529
Dielectric strength	500 V between input and ground 500 V between output and ground
Overvoltage category	Class II VDE 0106-1
Relative Humidity	0...90 % during operation 0...95 % during storage
MTBF reliability	1119603 H at 24 V DC with UTE C80-810 calculation method
Vibration resistance	2 gn 11.9...150 Hz)IEC 61131-2 3.5 mm 3...11.9 Hz)IEC 61131-2
Ordering and shipping details	
Category	22525-ABL8 AND ABL7 POWER SUPPLIE
Discount Schedule	CP12
GTIN	3389119406819
Returnability	No
Country of origin	PH
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.53 in (11.5 cm)
Package 1 Width	6.69 in (17.0 cm)
Package 1 Length	7.17 in (18.2 cm)
Package 1 Weight	3.09 lb(US) (1.401 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	60
Package 2 Height	31.50 in (80.0 cm)
Package 2 Width	31.50 in (80.0 cm)
Package 2 Length	23.62 in (60.0 cm)
Package 2 Weight	213.98 lb(US) (97.06 kg)

Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------


24...28.8 Vdc/40 A Power Supply Buffer Module

Dimensions

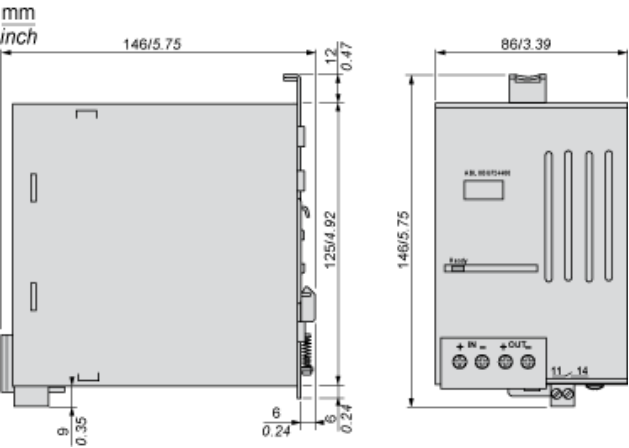

24...28.8 Vdc/40 A Power Supply Buffer Module


Mounting

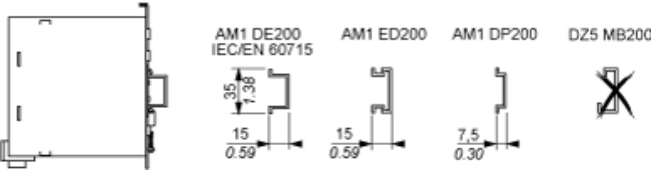

Paralleling Power Supply Buffer Modules

Wiring Diagram

Two outputs of buffer modules at maximum can be connected in parallel.

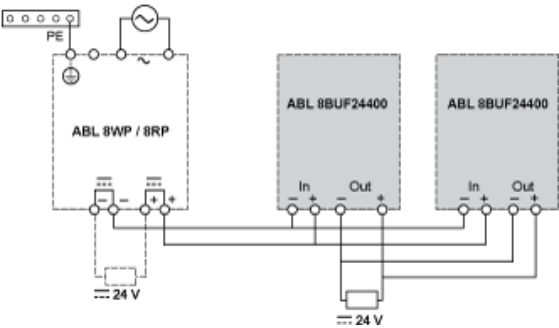

Supply by R/C (NMTR2, NMTR8), (E164867), Model ABL8 series.

Recommended replacement(s)