



GV3G264

Range	Linergy
Product name	FT
Device short name	GV3G
Product or component type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys Deca TeSys K TeSys U TeSys GV3
Product compatibility	GV3P LC1D40AD65A GV3L
Number of tap-offs	2
[Ith] conventional free air thermal current	115 A
Connection pitch	64 mm

Complementary

Mounting location	On terminal
[Ui] rated insulation voltage	690 V
Net weight	0.15 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	5.0 cm
Package 1 Length	12.0 cm
Package 1 Weight	154.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	30

Package 2 Height	15.0 cm	
Package 2 Width	15.0 cm	
Package 2 Length	40.0 cm	
Package 2 Weight	4.836 kg	


Offer Sustainability

Sustainable offer status	Green Premium product		
REACh Regulation	REACh Declaration		
REACh free of SVHC	Yes		
EU RoHS Directive	Compliant EU RoHS Declaration		
Toxic heavy metal free	Yes		
Mercury free	Yes		
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)		
RoHS exemption information	Yes		
Environmental Disclosure	Product Environmental Profile		
Circularity Profile	End of Life Information		
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		


Contractual warranty

Warranty 18 months


Mounting of External Operator GV3APN01, GV3APN02 or GV3APN04 for Motor Circuit Breakers GV3L

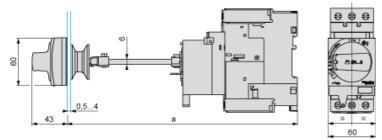

Door cut-out




Mounting of External Operator GVAPH03 for Motor Circuit Breakers GV3L

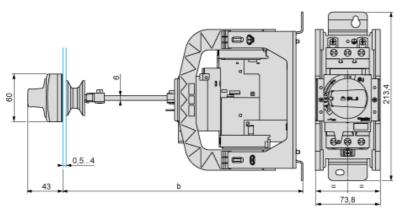

	b	
	Minimum	Maximum
GV3APN•• + GVAPH03	200	300
GV3APN•• + GVAPH03 + GVAPK12	300	492

Door cut-out



(1) For IP65 only.

Recommended replacement(s)