

Search Automation Controls 🔍

Home

Products

Download

Resource

Support

Sales  
Locations

Panasonic Industry > Automation Controls Top > FA Sensors & Components > Sensors > Inductive Proximity Sensors > GX-F15A

Sensors

Inductive Proximity Sensors >

Rectangular-shaped Inductive Proximity Sensor GX-F/H >

GX-F15A

Fiber Sensors >

Photoelectric Sensors / Laser Sensors >

Light Curtains / Safety Components >

Area Sensors >

Micro Photoelectric Sensors >

Particular Use Sensors >

Sensor Options >

Wire-Saving Systems >

Configuration examples of IO-Link compatible devices >


GX-F15A | Rectangular-shaped Inductive Proximity Sensor GX-F/H

Download

Catalog/  
Datasheet

CAD

Manual

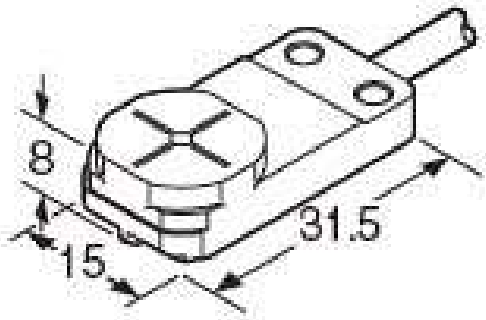

\*Photo may vary from actual product.



?



Contact Us

Technical inquiries,  
Purchase Support &  
Additional Assistance

Technical inquiry

Business inquiry

Other inquiry

Product Number	GX-F15A
Part Number	GX-F15A
Product	Rectangular-shaped Inductive Proximity Sensor
Details	NPN output
Product Name	<a href="#">Rectangular-shaped Inductive Proximity Sensor GX-</a>

Contact Us

Technical inquiry

Business inquiry

Other inquiry

Spec  
Detail



Accessories  
(Option)



As of April 26, 2025 (JST)  
\*Specifications and design of the products are subject to change without notice for the product improvement.

Spec Detail

Specifications and design of the products are subject to change without notice for the product improvement.

Item	Specifications
Product Number	GX-F15A
Part Number	GX-F15A
Products Name	Rectangular-shaped Inductive Proximity Sensor




Item	Specifications
Product details	NPN output
The price of the product	Please contact our office
Max. operation distance	5 mm 0.197 in plus or minus 8 % (Note) The maximum operation distance stands for the maximum distance for which the sensor can detect the standard sensing object.
Stable sensing range	0 to 4.2 mm 0 to 0.165 in (Note) The stable sensing range stands for the sensing range for which the sensor can stably detect the standard sensing object even if there is an ambient temperature drift and/or supply voltage fluctuation.
Standard sensing object	Iron sheet 20 × 20 × t 1 mm 0.787 × 0.787 × t 0.039 in
Applicable regulations and certifications	CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations)
Hysteresis	20 % or less of operation



Item	Specifications
	distance(with standard sensing object)
Repeatability	Along sensing axis, perpendicular to sensing axis: 0.04 mm 0.002 in or less
Supply voltage	12 to 24 V DC +10/-15 % Ripple P-P 10 % or less
Current consumption	15 mA or less
Output	NPN open-collector transistor - Maximum sink current: 100 mA - Applied voltage: 30 V DC or less (between output and 0 V) - Residual voltage: 2 V or less (at 100 mA sink current)
Output:Output operation	Normally open
Output:Utilization category	DC-12 or DC-13
Max. response frequency	250 Hz
Operation indicator	Orange LED(lights up when the output is ON)
Protection	IP68 (IEC), IP68g (JEM) (Note) Panasonic Electric Works SUNX's IP68 test method 1. Immerse at 0 m below 0 °C +32 °F water surface



Item	Specifications
	<p>leave for 30 min. Then, immerse at 0 m below +70 °C +158 °F water surface and leave for 30 min.</p> <p>2. Regard the heat shock test in 1 as one cycle and perform 20 cycles.</p> <p>3. Leave in water at a depth of 1 m 3.281 ft in water for 500 hours.</p> <p>4. After tests 1 to 3, insulation resistance, voltage withstandability, current consumption, and sensing ranges must meet the standard values.</p> <p>(Note) If using the sensor in an environment where cutting oil droplets splatter, the sensor may be deteriorated due to added substances in the oil.</p>
Ambient temperature	-25 to +70 °C -13 to +158 °F , Storage: -40 to +85 °C - 40 to +185 ※
Ambient humidity	45 to 85 % RH, Storage: 35 to 95 % RH
Voltage withstandability	1,000 V AC for one min. between all supply termin  connected




Item	Specifications
	together and enclosure
Insulation resistance	50 MΩ , or more, with 500 V DC megger between all supply terminals connected together and enclosure
Vibration resistance	10 to 500 Hz frequency, 3 mm 0.118 in double amplitude (Max. 20 G) in X, Y and Z directions for two hours each
Shock resistance	10,000 m/s <sup>2</sup> acceleration (1,000 G approx.) in X, Y and Z directions three times each
Sensing range variation:Temperature characteristics	Over ambient temperature range -25 to +70 °C -13 to +158 °F : Within plus or minus 8 % of sensing range at +23degrees +73.4degrees Fahrenheit .
Sensing range variation:Voltage characteristics	Within plus or minus 2 % for +10/-15 % fluctuation of the supply voltage
Material	Enclosure: PBT Indicator part: Polycarbonate / Polyester



Item	Specifications
Cable	0.15 mm <sup>2</sup> 3-core oil, heat and cold resistant cabtyre cable, 1 m <a href="#">3.281 ft</a> long
Cable extension	Extension up to total 100 m 328.084 ft is possible with 0.3 mm <sup>2</sup> , or more, cable.
Net weight	20 g approx.

## Accessories (Option)

	Product number	Part number	Product	D
	<a href="#">MS-GXL15</a>	MS-GXL15	-	-

### Recently checked products

### Recently checked product numbers

- GX-F12B-P | Rectangular-shaped Inductive Proximity Sensor GX-F/H >
- GX-F12B | Rectangular-shaped Inductive Proximity Sensor GX-F/H >
- GX-F12A-P | Rectangular-shaped Inductive Proximity Sensor GX-F/H >
- GX-F12A | Rectangular-shaped Inductive Proximity Sensor GX-F/H >
- DP-102A-E-P | Dual Display Digital Pressure Sensor [For Gas] DP-100 >



# Contact Us

## Control Components & Electronic Device Products Technical Support

Relays, Couplers, Connectors, Switches, and Other Control Components & Electronic Device Products

Contact Us

## FA Sensors & Components, Motors Technical Support

FA Sensors, PLC ,Eco Power Meters, Times, Counters, Limit Switches and Other FA Sensors & Components

Contact Us

## Motors Technical Support

Motors for FA & Industrial Application, Motors for Appliance & Automotive

Contact Us

## Guidelines for Ordering and Usage

Requests to customers (FA Sensors & Components [Excluding motors])

Requests to customers (Dedicated to industrial motors)

Components & Devices



ys / Couplers

FA Sensors & Components

Fiber Sensors

Sensor Options

Static Control Devices

Motors for FA & Industrial Application





Connectors	Photoelectric	Wire-Saving	Laser Markers /	AC Servo
Switches	Sensors / Laser	Systems	2D Code	Motors for HVAC &
Encoders /	Sensors	Programmable	Readers	Automotive
Potentiometers	Micro	Controllers /	Machine Vision	
Transparent	Photoelectric	Motion	System	
Conductive Film	Sensors	Controller	Energy	
Cooling Fan	Light Curtains /	Human	Management	
	Safety	Machine	Solutions	
	Components	Interface		
	Area Sensors	Pressure		
	Inductive	Sensors / Flow		
	Proximity	Sensors		
	Sensors	Measurement		
	Particular Use	Sensors		
	Sensors			

