


# Product datasheet

Specifications

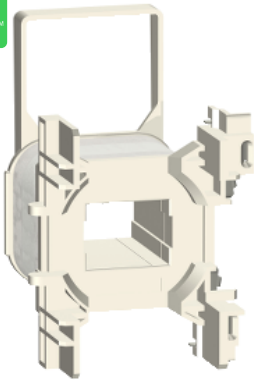

## TeSys D - contactor coil - LXD3 - 230 V AC 50/60 Hz for 40... 65 A contactor

LXD3P7

### Main

Range	TeSys
Product or component type	Contactor coil
Device short name	LXD3
Control circuit type	AC at 50/60 Hz
[Uc] control circuit voltage	230 V AC 50/60 Hz
Average resistance	192 Ohm at 20 °C
Inductance of closed circuit	10.9 H
Product compatibility	LC1DT80A LC1D40A...D65A LC1DT60A
Mechanical durability	6 Mcycles
Maximum operating rate	3600 cyc/h 60 °C

### Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Drop-out: 0.3...0.6 Uc at 50/60 Hz (at <60 °C) Operational: 0.8...1.1 Uc at 50 Hz (at <60 °C) Operational: 0.85...1.1 Uc at 60 Hz (at <60 °C)
Inrush power in VA	160 VA 60 Hz cos phi 0.75 (at 20 °C) 160 VA 50 Hz cos phi 0.75 (at 20 °C)
Hold-in power consumption in VA	15 VA 60 Hz cos phi 0.3 (at 20 °C) 15 VA 50 Hz cos phi 0.3 (at 20 °C)
Heat dissipation	4...5 W at 50/60 Hz

### Environment

Ambient air temperature for operation	-5...60 °C
Net weight	0.07 kg

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.8 cm

Package 1 Width	5.8 cm
Package 1 Length	9.8 cm
Package 1 Weight	121 g
Unit Type of Package 2	S02
Number of Units in Package 2	30
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	4.085 kg
Unit Type of Package 3	P06
Number of Units in Package 3	240
Package 3 Height	80 cm
Package 3 Width	80 cm
Package 3 Length	60 cm
Package 3 Weight	50.54 kg

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
PVC free	Yes

### Contractual warranty

Warranty	18 months
----------	-----------

### Recommended replacement(s)