Product datasheet

Specification





round pilot light Ø 22 - green - integral LED - 220 V AC - screw clamp terminals

XA2EVM3LC

Main

Range of product	Easy Harmony XA2	
Product or component type	Monolithic pilot light	
Device short name	XA2	
Mounting diameter	22.5 mm	
Shape of signaling unit head	Round	
Cap/operator or lens colour	Green	
Light source	LED	
Bulb base	Integral LED	
[Us] rated supply voltage	220230 V AC 50/60 Hz	

Complementary

(X1-X2)PL	
Fixing hole 22.3 +0.4/0 conforming to IEC 60947-5-1	
>= 30 x 40 mm (support panel) metal - thickness: 16 mm >= 30 x 40 mm (support panel) plastic - thickness: 26 mm	
Fixing nut beneath head recommended torque: 2.2 N.m (+/- 0.2 N.m)	
CE CCC	
220230 V	
Screw clamp terminals, <= 2 x 1.5 mm² with cable end conforming to IEC 60947-1 Screw clamp terminals, 1 x 0.51 x 2.5 mm² without cable end conforming to IEC 60947-1	
0.81 N.m conforming to IEC 60947-1	
w head Cross compatible with Philips No 2 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver	
400 V (pollution degree 3) conforming to IEC 60947-1	
6 kV conforming to IEC 60947-1	
Steady	
0.81.2 V AC	
<= 20 mA	
40000 h at rated voltage and 25 °C	
29 mm	
29 mm	

Depth	53 mm
Net weight	0.02 kg

Environment

Ambient air temperature for storage	-4070 °C	
Ambient air temperature for operation	-2570 °C	
Overvoltage category	Class I conforming to IEC 536	
IP degree of protection	IP65 conforming to IEC 60529	
IK degree of protection	IK05	
Standards	IEC 60947-1 IEC 60947-5-1 GB 14048.5 GB 14048.1 IEC 60529 IEC 50102	
Product certifications	CE CCC	
Vibration resistance	sistance 5 gn (f= 12500 Hz) conforming to IEC 60068-2-6	
Shock resistance	stance 30 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27	

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	1.991 cm	
Package 1 Width	2.934 cm	
Package 1 Length	5.313 cm	
Package 1 Weight	0.021 kg	
Unit Type of Package 2	BB1	
Number of Units in Package 2	10	
Package 2 Height	5.8 cm	
Package 2 Width	6.4 cm	
Package 2 Length	15.8 cm	
Package 2 Weight	0.234 kg	
Unit Type of Package 3	S02	
Number of Units in Package 3	160	
Package 3 Height	15 cm	
Package 3 Width	30 cm	
Package 3 Length	40 cm	
Package 3 Weight	4.059 kg	



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

	Reach Free Of Svhc	
②	Toxic Heavy Metal Free	
⊘	Mercury Free	
⊘	Rohs Exemption Information	Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

XA2EVM3LC

Dimensions Drawings

Dimensions

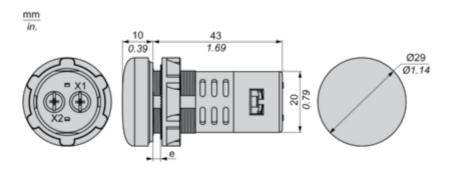

e: Calmping thickness:1 to 6 mm/0.04 to 0.24 in.


Product datasheet

XA2EVM3LC

Mounting and Clearance

Panel Cut-Out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals



- (1) Diameter on finished panel or support
- (2) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)

Connections and Schema

Wiring Diagram



(1) LED