

# XMLRM01G2P05

Electronic pressure sensors, Pressure sensors  
XM, XMLR -1 bar, G 1/4, 24 VDC, 2xPNP, M12



## Main

|   |  |
|---|--|
| Range of product                        | Telemecanique Pressure sensors XM  |
| Product or component type               | Electronic pressure sensors  |
| Pressure sensor type                    | Pressure transmitter   |
| Pressure switch type of operation       | Pressure switch with 2 switching outputs   |
| Device short name                       | XMLR   |
| Pressure rating                         | -100.0 KPa<br>-1 bar   |
| Maximum permissible accidental pressure | 3 Bar<br>296.5 KPa<br>300 kPa  |
| Destruction pressure                    | 300 KPa<br>296.5 KPa<br>3 bar  |
| Controlled fluid                        | Fresh water (0...80 °C)<br>Air (-20...80 °C)<br>Hydraulic oil (-20...80 °C)<br>Refrigeration fluid (-20...80 °C) |
| Fluid connection type                   | G 1/4 (female) conforming to DIN 3852-Y  |
| [Us] rated supply voltage               | 24 V DC SELV (voltage limits: 17...33 V)   |

## Complementary

|   |   |
|---|---|
| Current consumption                                     | <= 50 mA  |
| Electrical connection                                   | Male connector M12, 4 pins  |
| Type of output signal                                   | Discrete  |
| Discrete output type                                    | Solid state PNP, 2 NO/NC programmable   |
| Maximum switching current                               | 250 mA  |
| Contacts type and composition                           | 2 NO/NC programmable  |
| Scale type  | Fixed differential  |
| Maximum voltage drop                                    | 2 V   |
| Adjustable range of switching point on rising pressure  | -1...-0.08 Bar<br>-100...-8 KPa<br>-100.0...-8.00 kPa   |
| Adjustable range of switching point on falling pressure | -97.2...-5.03 KPa<br>-97...5 KPa<br>-0.97...-0.05 bar   |
| Minimum differential travel                             | 0.03 Bar<br>2.96 KPa<br>3 kPa   |
| Materials in contact with fluid                         | Fluorocarbon FKM (Viton)<br>Ceramic<br>316L stainless steel                                   |
| Front material  | Polyester   |
| Housing material  | Polyacrylamide<br>316L stainless steel  |
| Operating position                                      | Any position, but disposals can falsified the measurement in case of upside down mounting     |
| Protection type   | Short-circuit protection<br>Overload protection<br>Overvoltage protection<br>Reverse polarity |
| Response time on output                                 | <= 5 ms for discrete output   |

|  |  |
|--|--|
| Switching output time delay              | 0...50 s in steps of 1 second  |
| Display type                             | 4 digits 7 segments  |
| Local signalling                         | 2 LEDs (yellow) for light ON when switch is actuated   |
| Display response time type               | Fast 50 ms<br>Normal 200 ms<br>Slow 600 ms   |
| Maximum delay first up                   | 300 ms   |
| Overall accuracy                         | <= 1 % of the measuring range  |
| Measurement accuracy on switching output | <= 0.6 % of the measuring range  |
| Repeat accuracy                          | <= 0.2 % of the measuring range  |
| Drift of the sensitivity                 | +/- 0.03 % of measuring range/°C   |
| Drift of the zero point                  | +/- 0.1 % of measuring range/°C  |
| Display accuracy                         | <= 1 % of the measuring range  |
| Mechanical durability                    | 10000000 cycles  |
| Depth                                    | 42 mm  |
| Height                                   | 93 mm  |
| Width                                    | 41 mm  |
| Net weight                               | 0.19 kg  |
| [Uimp] rated impulse withstand voltage   | 0.5 kV DC  |
| Electromagnetic compatibility            | Susceptibility to electromagnetic fields: 10 V/m 80...2000 MHz conforming to IEC 61000-4-3<br>Immunity to conducted RF disturbances: 10 V 0.15...80 MHz conforming to IEC 61000-4-6<br>Surge immunity test: 1 kV conforming to IEC 61000-4-5<br>Electrical fast transient/burst immunity test: 2 kV conforming to IEC 61000-4-4<br>Electrostatic discharge immunity test: 8 kV air, 4 kV contact conforming to IEC 61000-4-2 |

## Environment

|                                       |  |
|---------------------------------------|--|
| Marking                               | CE   |
| Product certifications                | cULus  |
| Standards                             | UL 61010-1<br>IEC 61326-2-3                                  |
| Ambient air temperature for operation | -20...80 °C  |
| Ambient air temperature for storage   | -40...80 °C  |
| IP degree of protection               | IP65 conforming to IEC 60529<br>IP67 conforming to IEC 60529 |
| Vibration resistance                  | 20 gn (f= 10...2000 Hz) conforming to IEC 60068-2-6          |
| Shock resistance                      | 50 gn conforming to IEC 60068-2-27                           |


## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 6.600 cm  |
| Package 1 Width              | 7.400 cm  |
| Package 1 Length             | 13.000 cm |
| Package 1 Weight             | 188.000 g |
| Unit Type of Package 2       | S02       |
| Number of Units in Package 2 | 20        |
| Package 2 Height             | 15 cm     |
| Package 2 Width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Package 2 Weight             | 4.075 kg  |

## Offer Sustainability

|  |   |
|--|---|
| California proposition 65                  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| For all Reach Rohs enquiries contact us at | <a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>  |

## Dimensions

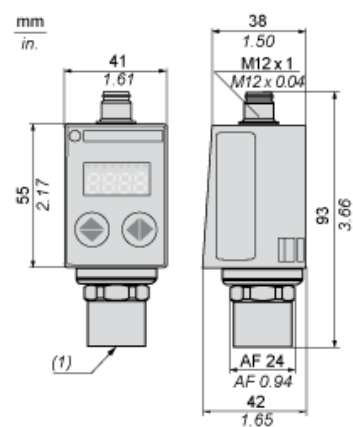


---

Connections and Schema


---

Connector Wiring



### Switching Output Description. Hysteresis Mode

The hysteresis switching mode is typically used for the “pumping and/or emptying applications”.

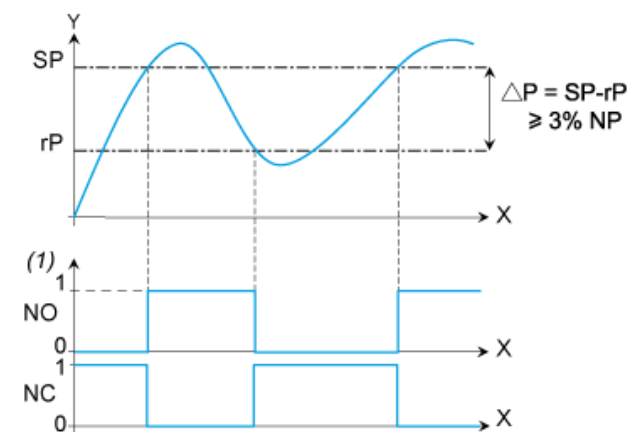

X : Time

Y : Pressure

(1) Output


NP : Nominal Pressure

SP : Set point (adjustable from 8 % to 100 % NP)

rP : Reset point (adjustable from 5 % to 97 % NP)

### Switching Output Description. Window Mode

The window switching mode is typically used for the “pressure regulation applications”

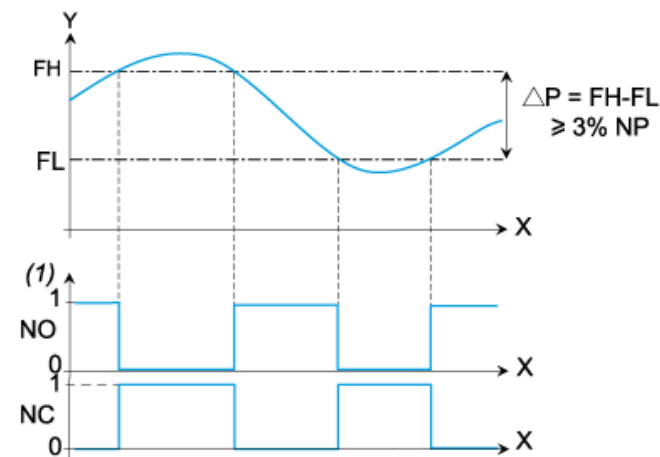

X : Time

Y : Pressure

(1) Output

NP : Nominal pressure


FH : High switching point (adjustable from 8 % to 100 % NP)

FL : Low switching point (adjustable from 5 % to 97 % NP)

### Switching Output Description. Time Delay

The Time Delay is typically used to filter out the fast pressure transients.

The output only switches after a time “dS” and “dr” adjustable from 0 to 50 seconds.

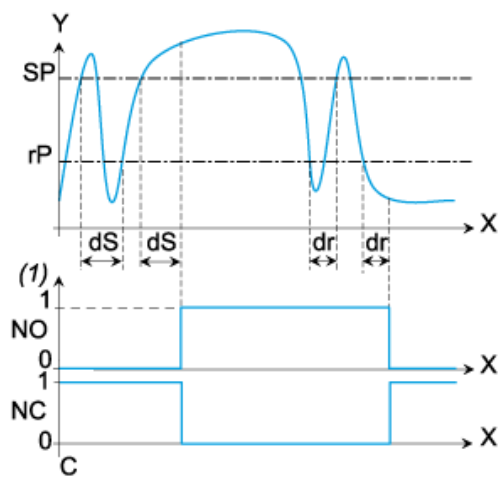

X : Time

Y : Pressure

(1) Output

SP : Set point

rP : Reset point

dS : Time delay on the set point

dr : Time delay on the reset point