

# Product data sheet

Specifications



Monolithic precabled tower light,  
Harmony XVC, plastic, red, 40mm,  
base mounting, steady, IP54, 24V  
AC DC

XVC4B1K

Product availability: Non-Stock - Not normally stocked in  
distribution facility

Price\*: 117.00 USD

## Main

Range of Product	Harmony XVC4
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	1 illuminated unit
Sound signalling	Without
Mounting diameter	1.6 in (40 mm)
Component name	XVC
Device short name	XVC
Light source	LED steady red
Supply circuit type	AC/DC

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
mounting location	On base
Product mounting	On base
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.0005 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG Gauge	AWG 22
Cable length	19.7 in (500 mm)
marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	25 mA
Flashing frequency	1 Hz
Product Weight	0.2 lb(US) (0.1 kg)
Height	4.0 in (100.5 mm)

## Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	IEC 61000-6-2 IEC 61000-6-3
Product Certifications	UL
protective treatment	TC
Ambient Air Temperature for Storage	-31.0000000000...158.0000000000 °F (-35...70 °C)
Ambient Air Temperature for Operation	14.0000000000...122.0000000000 °F (-10...50 °C)
Electrical shock protection class	Class II IEC 61140
Overvoltage category	Class II IEC 61140
IP degree of protection	IP54 flat surface installation IEC 60529

## Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
GTIN	00785901558019
Returnability	No
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.480 in (6.300 cm)
Package 1 Width	2.913 in (7.400 cm)
Package 1 Length	18.307 in (46.500 cm)
Package 1 Weight	8.642 oz (245.000 g)
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	15.748 in (40.000 cm)
Package 2 Length	23.622 in (60.000 cm)
Package 2 Weight	9.242 lb(US) (4.192 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

## Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

China Rohs Regulation	<a href="#">China RoHS declaration</a>
-----------------------	--

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

Circularity Profile	<a href="#">End of Life Information</a>
---------------------	---


California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	---

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

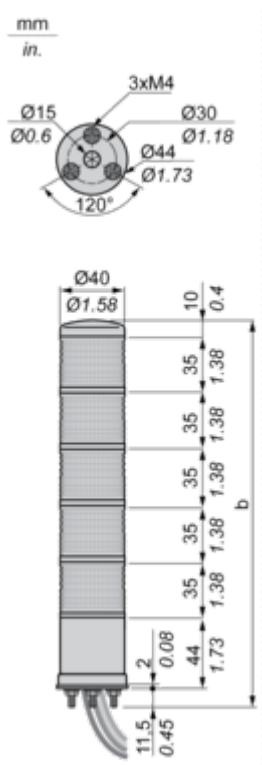

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in)
1 stage	100.50	3.96
2 stages	135.50	5.33
3 stages	170.50	6.71
4 stages	205.50	8.09
5 stages	240.50	9.47

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Direct Mounting on Horizontal Support

Panel cut-out

