

Product datasheet

Specifications

Multi-sound Siren

XVS14BMW



Main

Range of product	Harmony XVS
Product or component type	Multisound siren
Device short name	XVS

Complementary

Colour	White
Material	ASA (Acrylonitrile Styrene Acrylate): front ASA (Acrylonitrile Styrene Acrylate): back PC (polycarbonate): back cover
Net weight	1 kg
Marking	CE
Mounting support	Bracket
Fixing mode	3 holes Ø 9 mm
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	350 mA at 24 V 250 mA at 12 V
Electrical connection	Cable: 6.5...8.5 mm, 0.33 mm² / AWG 22 (signalling circuit) Cable: 6.5...8.5 mm, 0.52 mm² / AWG 20 (power circuit)
Width	140 mm
Height	114 mm
Depth	223 mm

Environment

Signalling type	43 tones siren
Standards	EN 61000-6-2 EN 55014-2 EN 55022 EN 61000-6-3
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C

Overvoltage category	Class II conforming to EN/IEC 61140
IP degree of protection	IP53 conforming to EN/IEC 60529
[Us] rated supply voltage	12 V DC 24 V DC
Noise level	0...105 dB (continuous or intermittent tone) at 1 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	30 cm
Package 1 Width	18 cm
Package 1 Length	18.5 cm
Package 1 Weight	1.307 kg
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	9.094 kg
Unit Type of Package 3	PAL
Number of Units in Package 3	24
Package 3 Height	60 cm
Package 3 Width	80 cm
Package 3 Length	24 cm
Package 3 Weight	33.024 kg

Offer Sustainability


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

Siren

Dimensions

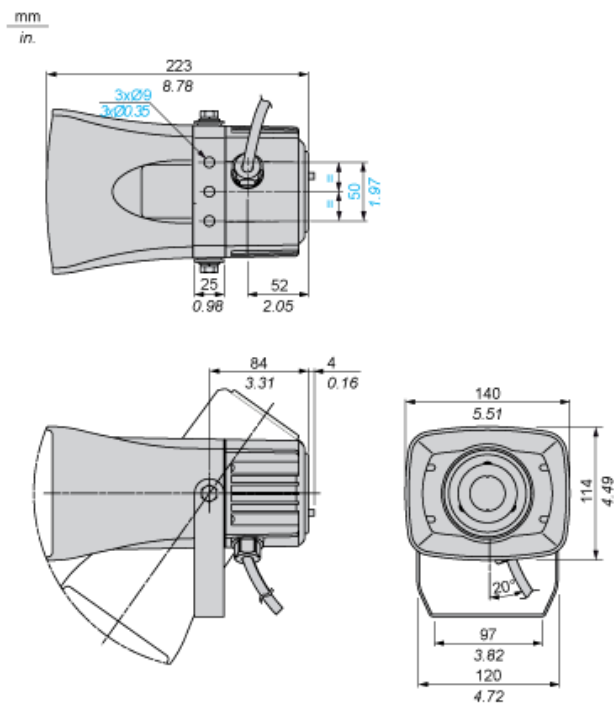

Recommended replacement(s)